



We lead the way by a new business model



**WELE MECHATRONIC CO., LTD**  
(<http://www.welegroup.com>)

**HEADQUARTERS:**  
No.458, Shinsing Rd., Hukou Town, Hsin-Chu County 303  
TEL : +886-3-696-0360 (rep.) FAX : +886-3-696-0370

**TAICHUNG BRANCH:**  
No.600, Sec. 4, Sanfeng Rd., Houli Dist., Taichung City 421  
TEL : +886-4-2558-0762 FAX : +886-4-2558-2334

**WELE MECHATRONIC (SU-ZHOU) CO., LTD.**

No. 16, Fuhua Rd., Changshu Economic Development Zone,  
Changshu City, Jiangsu Province, 215513  
TEL : +86-512-5229-7868 FAX : +86-512-5229-7866  
SALES: 150-5141-3969,150-5141-3981

# AA65SERIES

1910501 Macús TEL:01-2735326


Vertical Machining Center



**WELE MECHATRONIC CO., LTD**

## AA 65 series

The machine series developed for the demanding, high performance cutting tools. Fitted with generously sized sliding guides and equipped with a mechanical, two speeds geared head as standard which is directly coupled to the precision spindle.

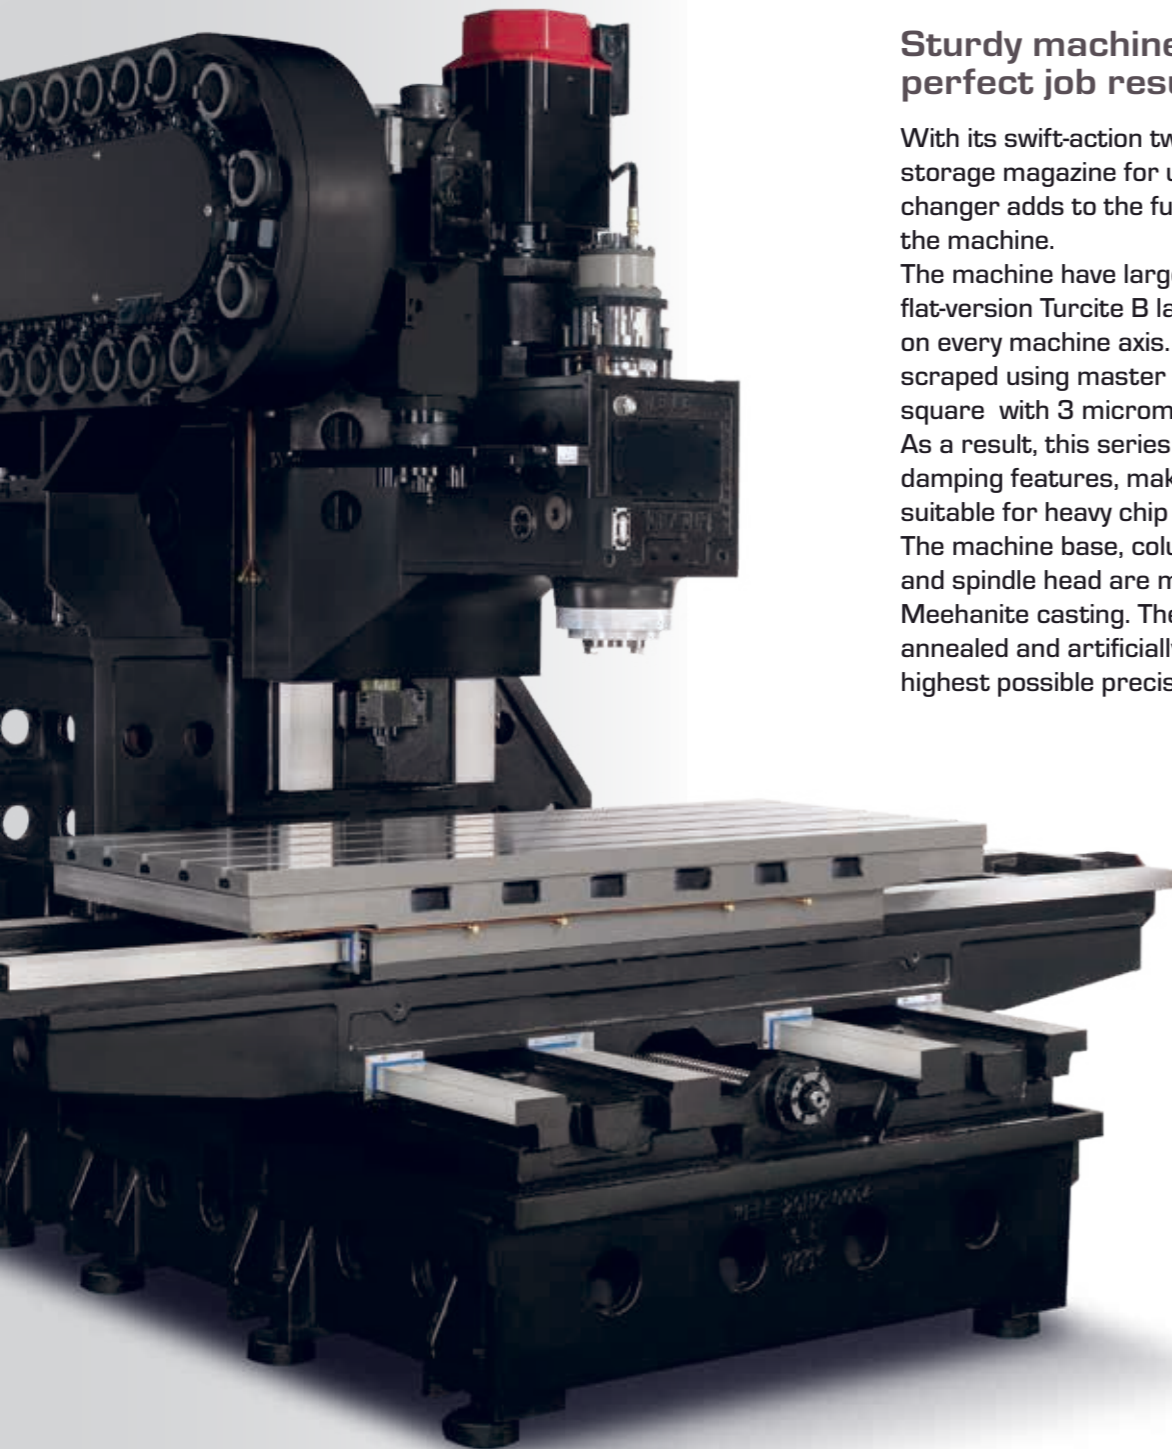


### Sturdy machine base for perfect job results

With its swift-action twin gripper arm and storage magazine for up to 40 tools, the tool changer adds to the further automation of the machine.

The machine have large, tempered, precision flat-version Turcite B laminated guideways on every machine axis. The surface is hand scraped using master plates of 1200mm square with 3 micrometer flatness.

As a result, this series offers the ideal damping features, making it especially suitable for heavy chip removal cutting. The machine base, column, cross slide and spindle head are made of high quality Meehanite casting. The components are annealed and artificially aged to ensure the highest possible precision.

## The precision vertical machining center

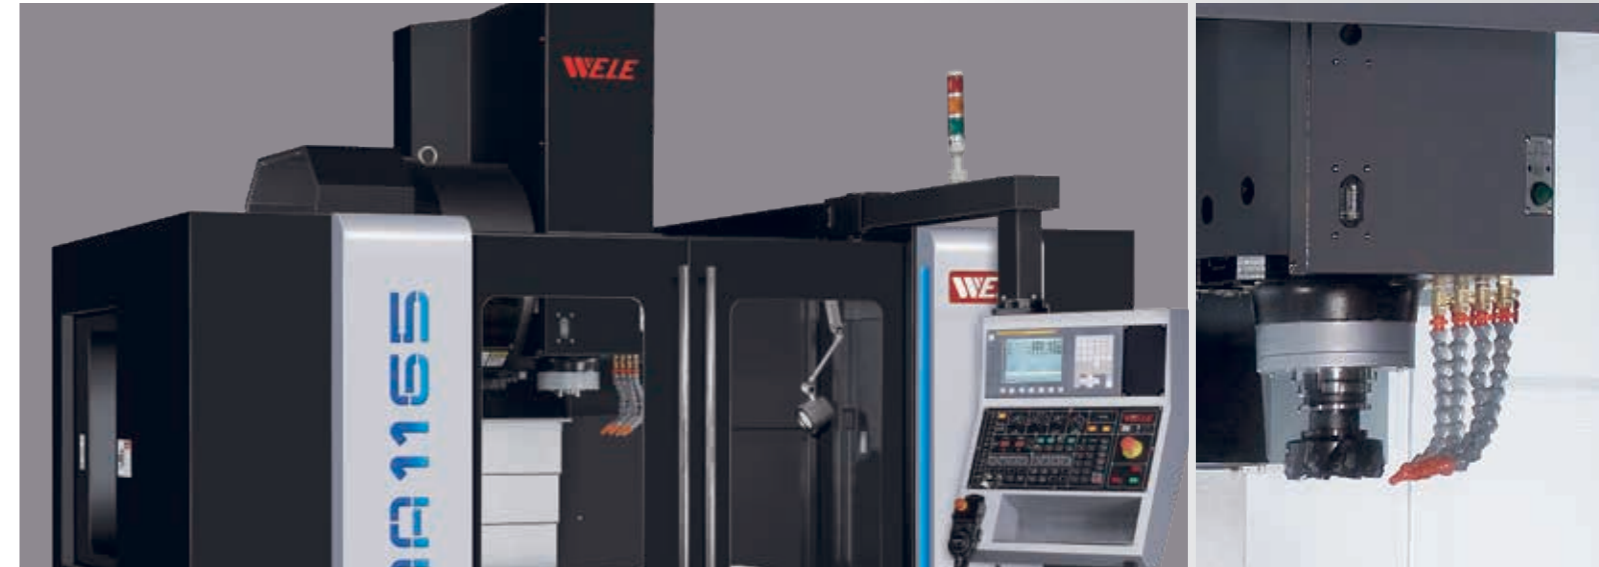

### Vertical cutting to WELE standard


Powerful digital servo feed drives - coupled with pre-tension ball screws - provide superior dynamic and precision. Active and effective protection for the guides from chip and dirt comes from the slide-along telescopic guard rails.

The two speeds mechanical geared head, combined with high performance AC main drive motor, provides high speeds as well as powerful torque. Additional to this, an oil cooler ensure the machining center also keep its thermal stability when spindle running constantly.

Two Y direction screw type conveyors and a X direction caterpillar type conveyor have been incorporated into the working envelope to ensure that the chip is efficiently discharged from the machine.

A central lubrication system which does the lubricant on all guideways and ball screws according to the timing and stroke, which reduces the requiring maintain work to a minimum.

The positions of the three sliding axes X, Y and Z are aligned at the factory using scraping skill and laser interferometer measurement. This guarantee the ultra-precision even with interpolated axes.

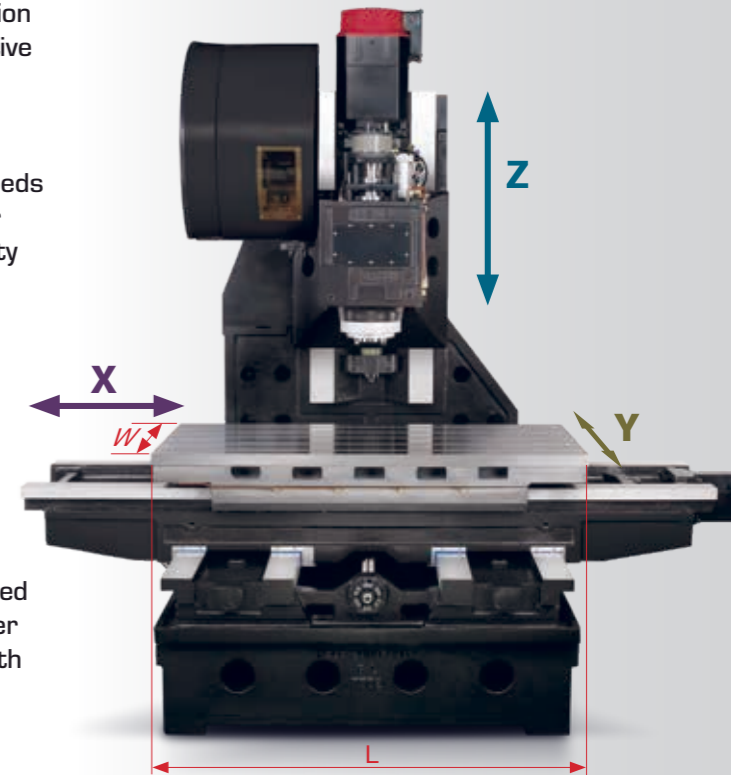


		AA965	AA1165	AA1365	AA1565
<b>Strokes</b>					
X travel (left & right)	mm(in)	900(35.4)	1100(43.3)	1300(51.2)	1500(59.0)
Y travel (in & out)	mm(in)	650(25.6)	650(25.6)	650(25.6)	650(25.6)
Z travel (up & down)	mm(in)	600(23.6)	600(23.6)	600(23.6)	600(23.6)
<b>Table dimensions</b>					
L	mm(in)	1100(43.3)	1300(51.2)	1450(57.1)	1650(65)
W	mm(in)	650(25.6)	650(25.6)	650(25.6)	650(25.6)
Table load capacity	kg(lb)	900(1,980)	1100(2,420)	1300(2,860)	1500(3,300)




# Spindle output torque chart




## Gear driven spindle

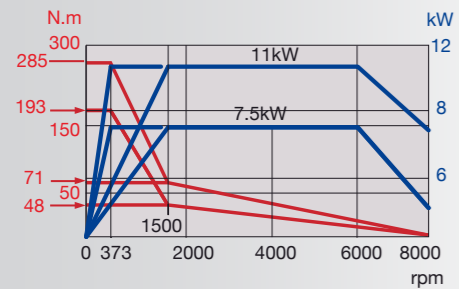

Fanuc alpha 8/8000i Spindle Motor(10/15HP) (STD.)

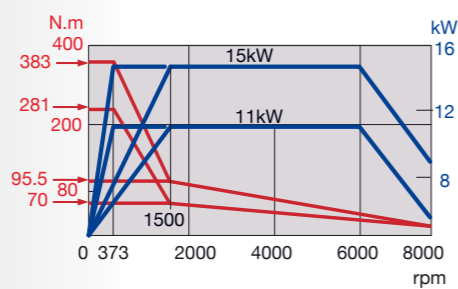


Fanuc alpha 12/10000i Spindle Motor(15/20HP) (OPT.)

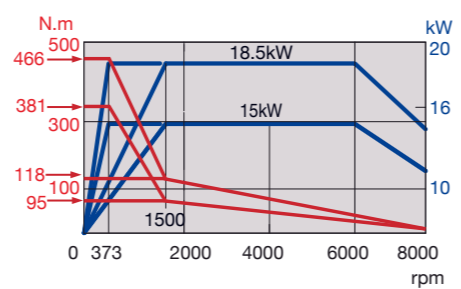


Fanuc alpha 15/10000i Spindle Motor(20/25HP) (OPT.)


## Direct driven spindle

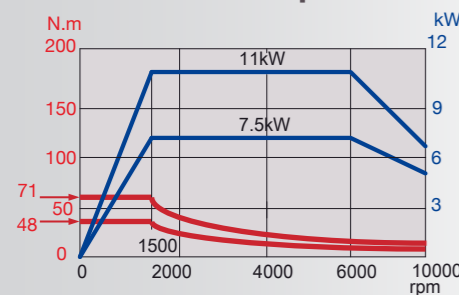

Fanuc alpha 8/10000i Spindle Motor(10/15HP) (OPT.)

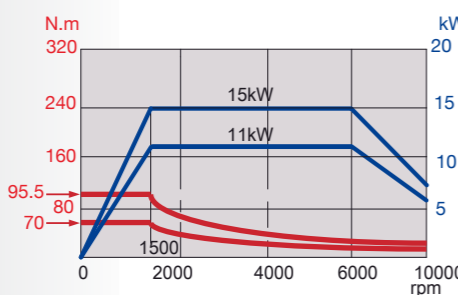

Fanuc alpha 12/10000i Spindle Motor(15/20HP) (OPT.)

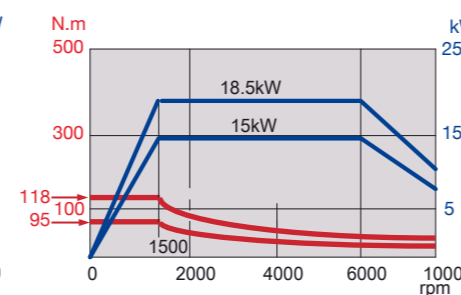


Fanuc alpha 15/10000i Spindle Motor(20/25) (OPT.)

# High Efficiency Cutting Performance

AA 965 Gear driven spindle BT40 / 8000 rpm / AC 15/18.5 kW (OPT) Material: S45C

Face milling	ø100x6t
Spindle speed (S)	400 rpm
Cutting velocity (Vc)	126 m/min
Cutting width (ae)	80 mm
Cutting depth (ap)	5.5 mm
Cutting feedrate (Vf)	1200 mm/min
Cutting feedrate per tip (fz)	0.5 mm/tooth
Cutting capacity (MRR)	528 cc/min
Cutting capacity per kW (MRR/kW)	35 cc/min · kW

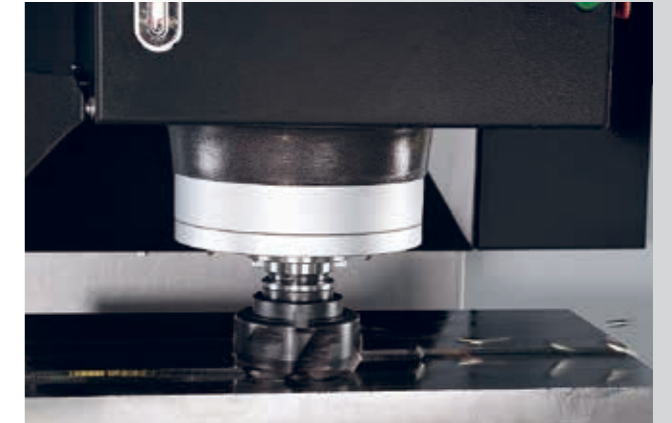

End milling ø32x2t	Side milling	Slot milling
Spindle speed (S)	1500 rpm	1500 rpm
Cutting velocity (Vc)	150 m/min	150 m/min
Cutting width (ae)	16 mm	32 mm
Cutting depth (ap)	32 mm	16 mm
Cutting feedrate (Vf)	400 mm/min	400 mm/min
Cutting feedrate per tip (fz)	0.13 mm/tooth	0.13 mm/tooth
Cutting capacity (MRR)	205 cc/min	205 cc/min



Drilling ø33	Use 20 bar CTS (Opt)
Spindle speed (S)	2000 rpm
Cutting velocity (Vc)	207 m/min
Cutting feedrate (Vf)	250 mm/min
Cutting feedrate per tip (fz)	0.125 mm/rev
Cutting capacity (MRR)	214 cc/min




Rigid tapping	M30xP3.5	M4xP0.7
Spindle speed (S)	180 rpm	2000 rpm
Cutting feedrate (Vf)	630 mm/min	1400 mm/min






## Strictly quality assurance

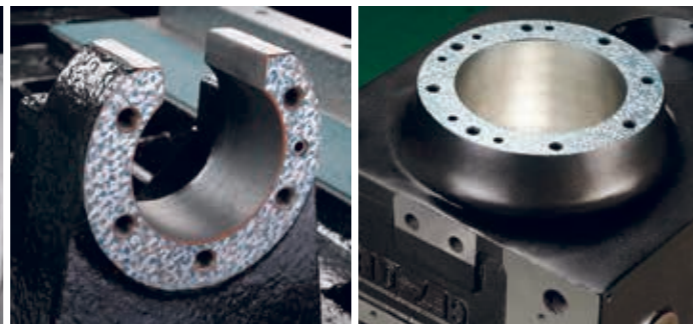

*Hand scraped contact areas, minimal axis protection with maximum stroke.*

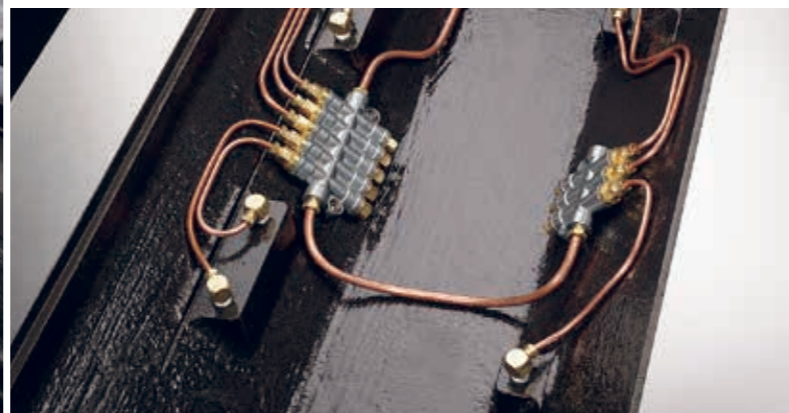

## Strictly manufacturing and assembling in precision and control every detail as Japanese standard

Pursue quality, approaching makes excessive demands


US Moore Artisan spirit - Holds the breath with rapt attention to finish all detail.






## Tool Shank and Pull Stud Dimension

Unit : mm(inch)

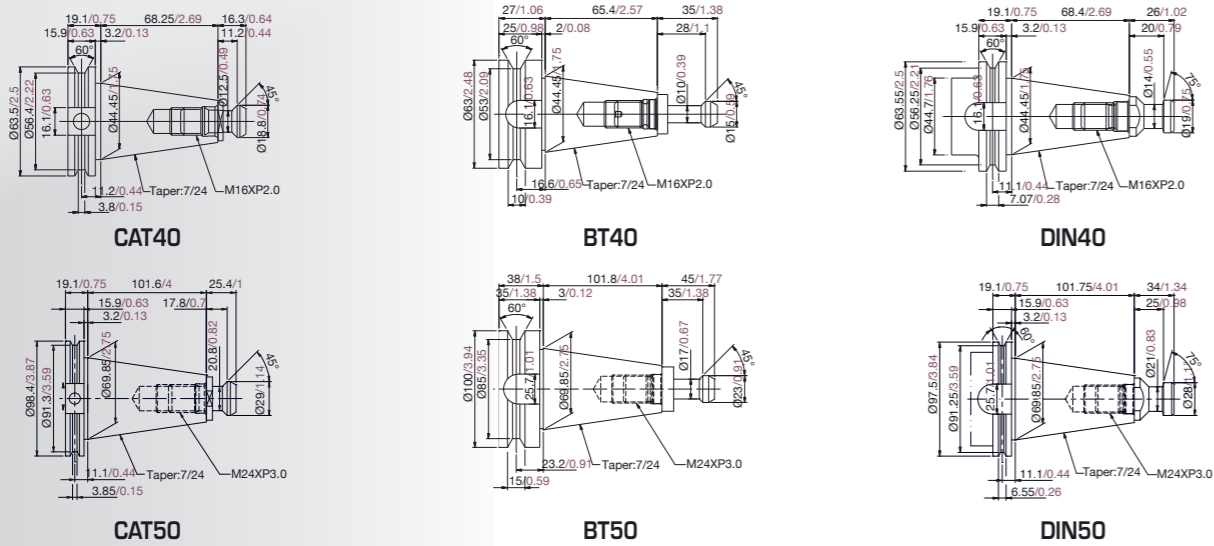


## Machine Dimension and Space Requirement

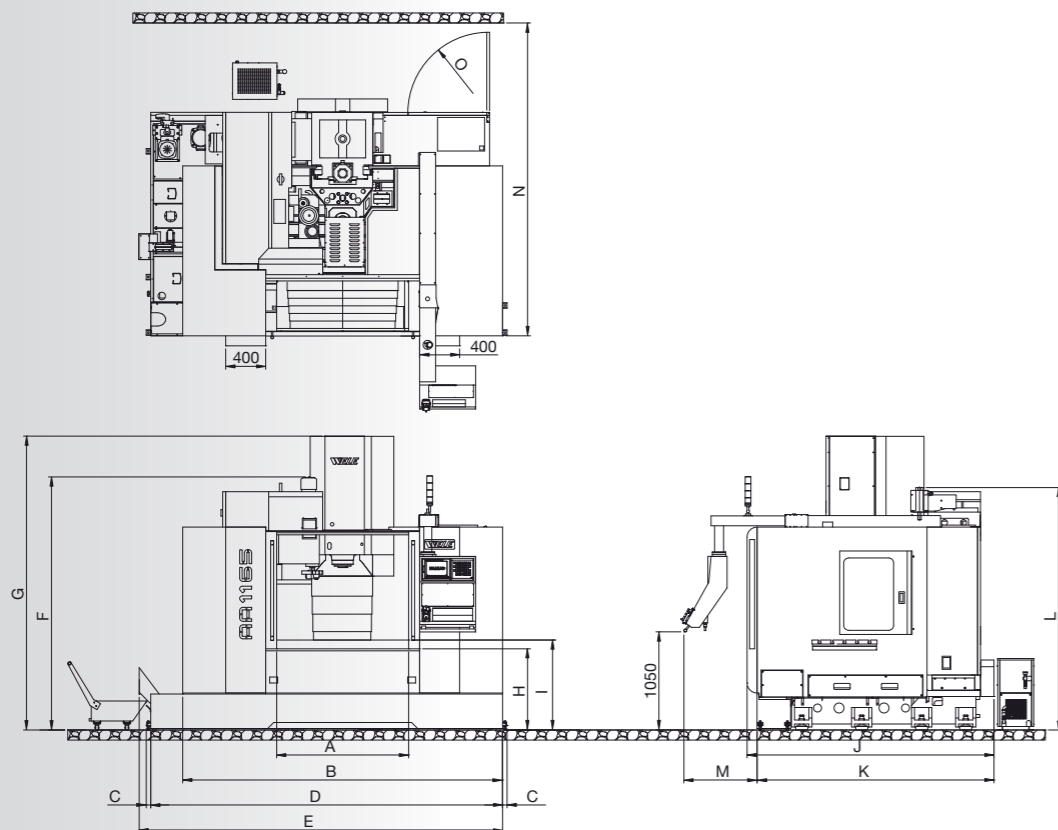

Unit : mm(inch)

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
AA965	1120 (44.1)	2940 (115.7)		3390 (133.5)	3505 (138)										
AA1165	1320 (52)	3200 (126)	45 (1.8)	3520 (138.6)	3635 (143.1)	2532 (99.7)	2940 (115.7)	812 (32)	900 (35.4)	2470 (97.2)	2370 (93.3)	2425 (95.5)	732 (28.8)	3130 (123.2)	810 (31.9)
AA1365	1470 (57.9)	3630 (142.9)		3735 (147)	3850 (151.6)										
AA1565	1670 (65.7)	4110 (161.8)		4110 (161.8)	4225 (166.3)										


## Inside of Working Area Dimensions

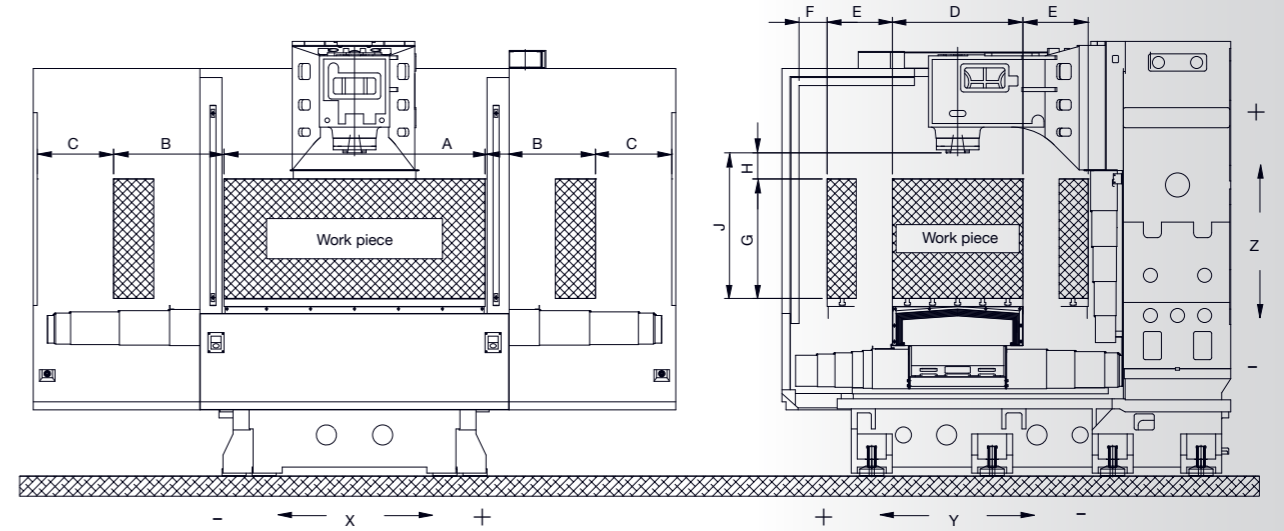

Unit : mm(inch)

	A	B	C	D	E	F	G	H	J
AA965	1100(43.3)	450(17.7)	450(17.7)						
AA1165	1300(51.2)	550(21.7)	380(15)	650 (25.6)	325 (12.8)	140 (5.5)	595 (23.4)	130 (5.1)	125~725 (4.9~28.5)
AA1365	1450(57.1)	650(25.6)	420(16.5)						
AA1565	1650(65)	750(29.5)	460(18.1)						

## Table Dimensions

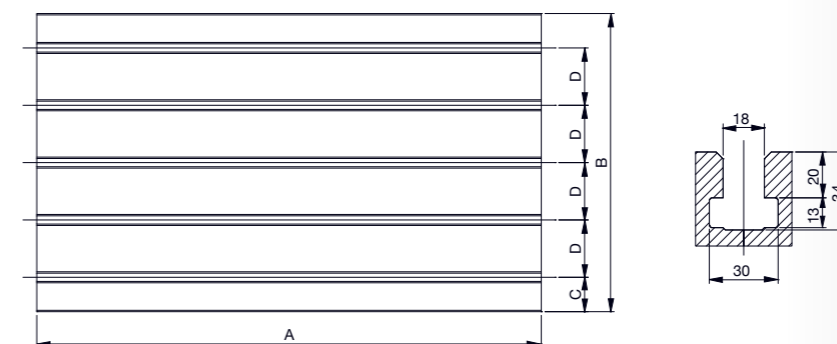

Unit : mm(inch)

	A	B	C	D
AA965	1100(43.3)	650(25.6)	75(3)	125(4.9)
AA1165	1300(51.2)	650(25.6)	75(3)	125(4.9)
AA1365	1450(57.1)	650(25.6)	75(3)	125(4.9)
AA1565	1650(65)	650(25.6)	75(3)	125(4.9)

## Technical specifications

Specification/Model	Unit	AA965	AA1165	AA1365	AA1565
<b>Travel</b>					
X travel (left & right)	mm(in)	900 (35.4)	1100 (43.3)	1300 (51.2)	1500 (59.1)
Y travel (in & out)	mm(in)	650 (25.6)			
Z travel (up & down)	mm(in)	600 (23.6)			
Distance from spindle nose to table top	mm(in)	125-725 (4.9-28.5)			
<b>Table</b>					
Table size ( X direction)	mm(in)	1100 (43.3)	1300 (51.2)	1450 (57.1)	1650 (65.0)
Table size ( Y direction)	mm(in)	650 (25.6)			
Table load capacity	kg(lb)	900 (1980)	1100 (2420)	1300 (2860)	1500 (3300)
<b>Spindle</b>					
Spindle speed	rpm	Belt driven / 8000			
Spindle motor (cont./30 min. rating)	kW(HP)	7.5/11 (10/15)			
Spindle taper		BT#40			
<b>Feedrate</b>					
Rapid traverse rate (X axis)	mm(in)/min		24000 (944.8)		15000 (590.6)
Rapid traverse rate (Y axis)	mm(in)/min		24000 (944.8)		15000 (590.6)
Rapid traverse rate (Z axis)	mm(in)/min		20000 (787.4)		12000 (472.4)
Cutting feedrate	mm(in)/min		1-10000 (0.04-393.7)		1-8000 (0.04-315)
<b>Tool magazine</b>					
Tool magazine capacity	pcs	20			
Max. tool diameter / adjacent pocket empty	mm(in)	80/150 (3.1/5.9)			
Max. tool length	mm(in)	250 (9.8)			
Max. tool weight	kg(lb)	7 (15.4)			
<b>Accuracy</b>					
Positioning accuracy (VDI/DGQ 3441)	mm(in)		P 0.012 (0.0005)		P 0.015 (0.0006)
Repeatability accuracy (VDI/DGQ 3441)	mm(in)		Ps 0.006 (0.0002)		Ps 0.008 (0.0003)
<b>Space requirement &amp; weight</b>					
Machine length	mm(in)	2940 (115.7)	3200 (126.0)	3630 (142.9)	4110 (161.8)
Machine width	mm(in)	2240 (88.2)			
Machine height	mm(in)	2940 (115.7)			
Machine weight	kg(lb)	7000 (15400)	7200 (15840)	7600 (16720)	8100 (17820)

\*\*Product specifications and accessories are subject to change without notice.

## Standard and optional accessories

● : Standard ○ : Option X : Not available

Specification / Model	AA965	AA1165	AA1365	AA1565
BT40 spindle taper	●	●	●	●
BT50 spindle taper	○	○	○	○
DIN50 spindle taper	○	○	○	○
CAT50 spindle taper	○	○	○	○
6,000 rpm belted spindle (BT#50), 15/20HP	○	○	○	○
6,000 rpm geared spindle (BT#50), 15/20HP	○	○	○	○
8,000 rpm belted spindle (BT#40)	●	●	●	●
8,000 rpm geared spindle (BT#40), 15/20HP	○	○	○	○
8,000 rpm direct driven spindle (20/25HP) BBT50	○	○	○	○
10,000 rpm direct driven spindle (20/25HP) BBT50	○	○	○	○
12,000 rpm direct driven spindle (20/25HP) BBT40	○	○	○	○
15,000 rpm direct driven spindle (20/25HP) BBT40	○	○	○	○
Column raise up for 200mm	○	○	○	○
Spindle & gearbox temperature control system	●	●	●	●
Centralized automatic lubricating system	●	●	●	●
Roof enclosure guarding system	●	●	●	●
Flood Coolant system (Pump & tank)	●	●	●	●
Recycling lubricating oil collector for 3 axes	●	●	●	●
Chip auger	●	●	●	●
Caterpillar type conveyor and bucket	○	○	○	○
20 capacity of umbrella type tool magazine (Tool holder #40)	●	●	●	●
24 capacity of arm type tool magazine (Tool holder #40, #50)	○	○	○	○
30 capacity of arm type tool magazine (Tool holder #40, #50)	○	○	○	○
40 capacity of arm type tool magazine (Tool holder #40, #50)	○	○	○	○
Rigid tapping	●	●	●	●
Switch for manual tool clamping	●	●	●	●
Remote handwheel control	●	●	●	●
Work light	●	●	●	●
Operation cycle finish and alarm lights	●	●	●	●
RS232 interface	●	●	●	●
Spray hose for chip wash down	●	●	●	●
Foundation bolt kit	●	●	●	●
Machine manuals	●	●	●	●
Linear scale feedback system for 3 axes	○	○	○	○
Coolant through the tool adapter	○	○	○	○
Coolant through the spindle (Form A)	○	○	○	○
Automatic tool length measurement (Renishaw or Blum)	○	○	○	○
Automatic workpiece measuring system (Renishaw or Blum)	○	○	○	○
CNC rotary table	○	○	○	○
4th axis interface prepared	○	○	○	○
FANUC OiMF controller	●	●	●	●
FANUC 31iMB controller	○	○	○	○
Heidenhain TNC 640 controller	○	○	○	○
Mitsubishi M830 controller	○	○	○	○

\*\* Product specifications and accessories are subject to change without notice.